



# BRANDWEREND DEUREN VOLGENS EN 1634-1 | MAXIMALE SPELING


## DOHE 010 - Maximale speling



Brandwerend

### Maximale speling (in mm)

	E1 30 / E12 30 / E12 60		E1 60	E12 120		E1 120 / E12 180	
	Europa	Frankrijk		Europa	Frankrijk	Europa	Frankrijk
(1) Zijstijl scharnierzijde	8.9	8	8.7	8	7	8.3	7.7
(2) Bovendorpel	8.9	8	8.7	8	8	8.3	8.7
(3) Zijstijl slotzijde (2 vleugels)	13.3	12	13.4	12.7	12.5	9.9	8.7
(4) Zijstijl slotzijde (1 vleugel)	8.9	8	8.7	8	6.5	8.3	7.2
(5) Onderdorpel	13.4	12	13.1	12.4	8	10.7	10.7
Minimum schootdiepte	/	8	/	/	/	/	/

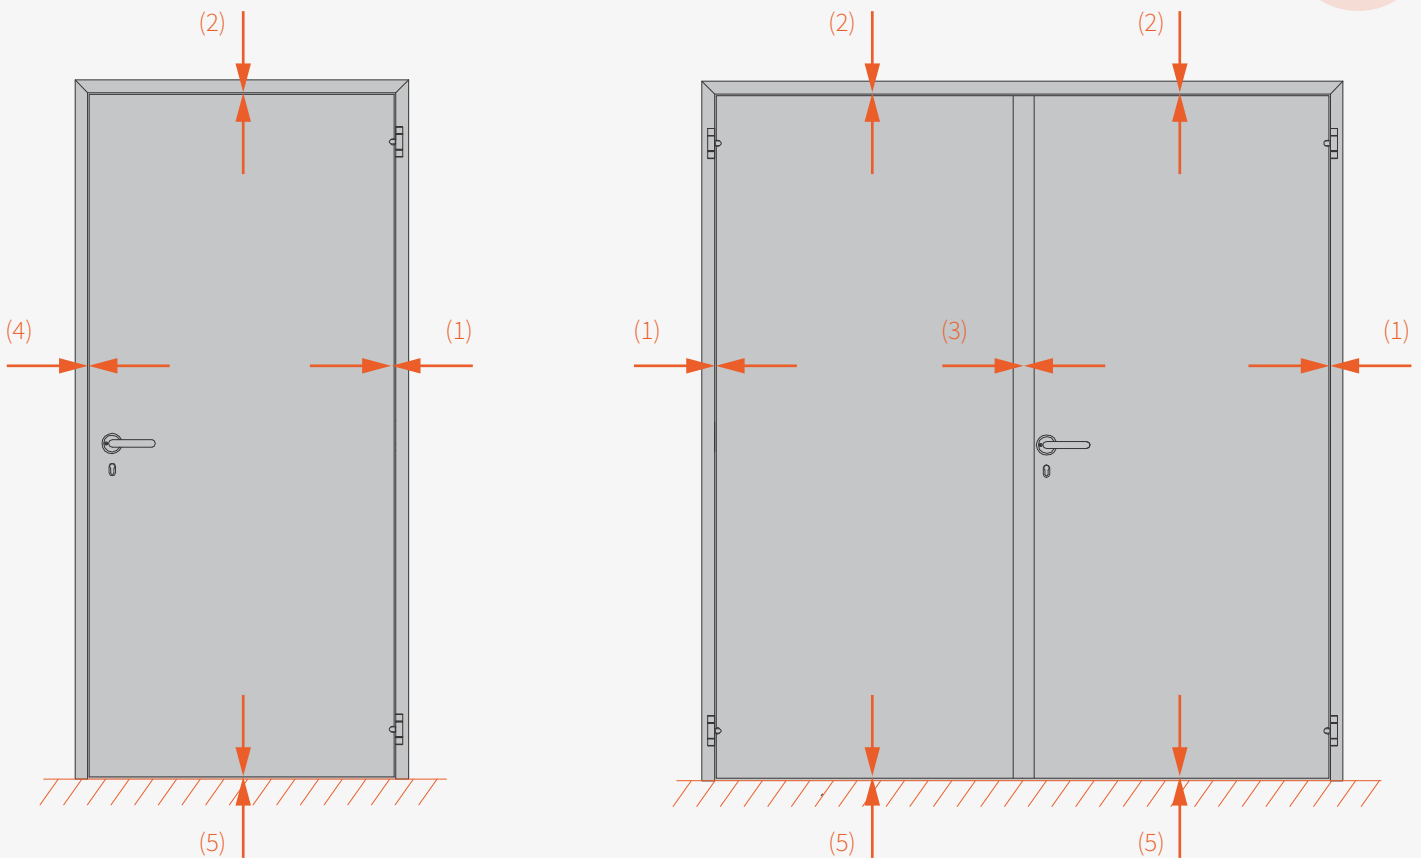

[www.heinen-doors.com](http://www.heinen-doors.com)